


TG 10 System

Manuale utente

www.karmaitaliana.it

INTRODUZIONE

Questo sistema è ideato per guide turistiche o attività all'aperto, per parlare o passare informazioni a un gruppo di persone

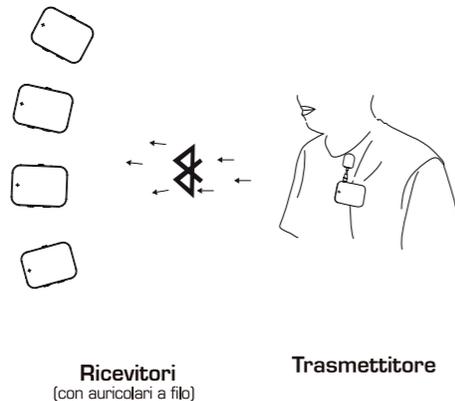

Ricevitori
(con auricolari a filo)

Trasmettitore

(1)

2 MODI DI INDOSSARE GLI APPARECCHI

Trasmettitore e ricevitore possono essere indossati a tracolla grazie alla cinghia in dotazione




In alternativa possono essere agganciati agli indumenti tramite la clip posta sul retro



(2)


3 MODI PER UTILIZZARE IL TRASMETTITORE

Il trasmettitore può utilizzare tre diversi microfoni: il microfono interno incorporato, il microfono a cravatta in dotazione o un microfono ad archetto opzionale (DMC 10).

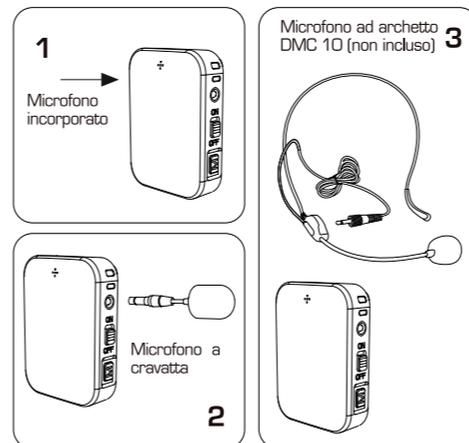


(3)

TRASMETTITORE (TG 10TX)

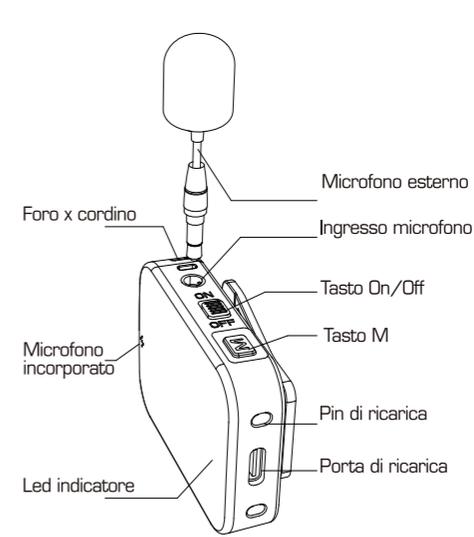


(4)

RICEVITORE (TG 10RX)

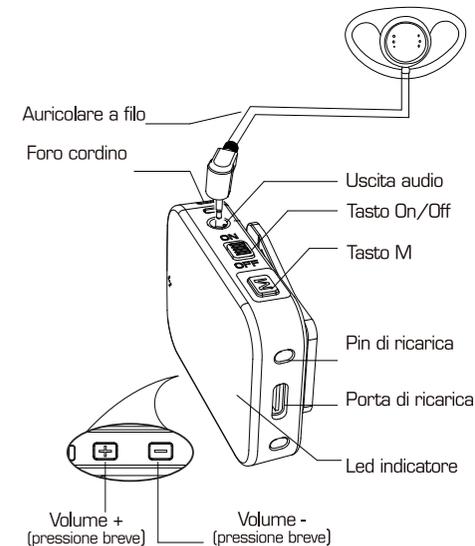

(5)

ACCENSIONE/SPEGNIMENTO/UTILIZZO

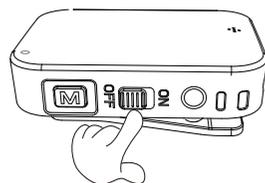

TRASMETTITORE

Accensione
Portate il tasto in posizione ON

☀ Il led blu si accende

Spegnimento
Portate il tasto in posizione OFF

☀ Il led blu si spegne

RICEVITORE

Accensione
Portate il tasto in posizione ON

☀ Il led blu lampeggia ogni 3 secondi

Spegnimento
Portate il tasto in posizione OFF


☀ Il led blu si spegne

Una volta acceso il sistema è pronto all'uso

(6)

CONNESSIONE TRASMETTITORE - RICEVITORE


1. Accendete il trasmettitore e premete il tasto "M" 5 volte: il trasmettitore entrerà in stato di connessione e il led blu lampeggerà velocemente.
2. Accendete il ricevitore e tenete premuto il tasto "M" per 3 secondi: la luce blu lampeggerà velocemente.

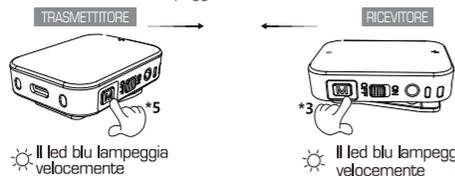

☀ Il led blu lampeggia velocemente

☀ Il led blu lampeggia velocemente

3. Avvicinate tra loro il trasmettitore il ricevitore, che si interfacceranno automaticamente: il led del ricevitore inizierà a lampeggiare lentamente.
4. A connessione avvenuta, premete il tasto "M" sul trasmettitore per confermare la connessione. Il led blu del trasmettitore e del ricevitore rimarranno sempre accesi.

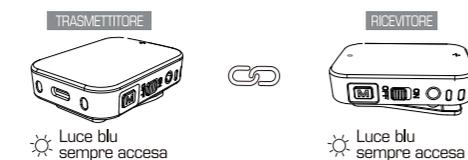


☀ Luce blu sempre accesa

☀ Luce blu sempre accesa

(7)

AGGIUNGERE ALTRI RICEVITORI

1. Tenete premuto il tasto "M" del trasmettitore per 3 secondi. Il trasmettitore entrerà in stato di attesa di connessione con i nuovi ricevitori e la luce blu lampeggerà velocemente.
2. Accendete il ricevitore che intendete aggiungere e tenete premuto il tasto "M" per 3 secondi. La luce blu lampeggerà velocemente.

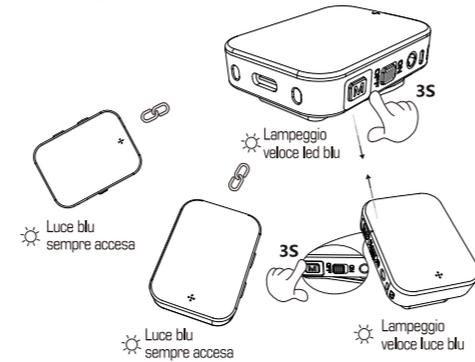

☀ Luce blu sempre accesa

☀ Lampeggio veloce led blu

☀ Lampeggio veloce luce blu


3. Quando un nuovo ricevitore si aggiunge al gruppo, la luce blu lampeggia lentamente: premete il tasto "M" del trasmettitore per confermare il collegamento.
4. A collegamento completato, la luce blu del ricevitore rimane sempre accesa.

(8)


MODALITÀ DI RICARICA

Mettete il trasmettitore e i ricevitori nella base di ricarica. La luce rossa rimarrà accesa durante la ricarica; la luce verde si accenderà a ricarica completata.

E' possibile anche utilizzare un ulteriore caricatore, utilizzando la seconda presa USB per caricare in contemporanea altre unità (max 20 pz tot.)

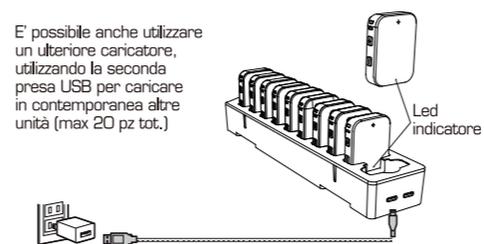

Ricarica del trasmettitore o del ricevitore tramite cavo: la luce rossa rimane accesa durante la ricarica; la luce verde rimane accesa a ricarica completata

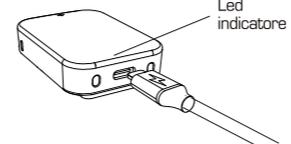

(9)

PRECAUZIONI ED AVVERTENZE

- Leggete con attenzione le istruzioni riportate su questo manuale.
- Non aprite il dispositivo, non smontatelo e non apportate modifiche.
- Non esponete il prodotto a temperature elevate (oltre i 40°), pioggia o umidità. Evitate che nel prodotto entrino liquido infiammabile, acqua o oggetti metallici.
- Trattate l'apparecchio e i suoi comandi con la dovuta delicatezza, evitando vibrazioni, cadute o colpi.
- In caso di problemi di funzionamento interrompete l'uso immediatamente e rivolgetevi all'assistenza autorizzata.

AVVERTENZE DI SICUREZZA BATTERIA

Il prodotto è alimentato da una batteria ricaricabile al litio. Non rimuovere, aprire o modificare la batteria. Per evitare il rischio di incendi o esplosioni, non esporre la batteria a fiamme, calore, umidità ed evitare che subisca degli urti. Non tenere il prodotto in carica più del necessario. In caso di perdite di liquido dalla batteria non utilizzare l'apparecchio ed evitare che il liquido entri in contatto con la pelle o gli occhi.

DICHIARAZIONE DI CONFORMITÀ UE

Il fabbricante, KARMA ITALIANA SRL, dichiara che gli apparecchi TG 10TX / TG 10RX / TG 10CH sono conformi alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo internet: www.karmaitaliana.it

Karma Italiana srl

SPECIFICHE TECNICHE

- Potenza di trasmissione: Classe 1
- Supporto: HSP, HFP, A2DP, AVRCP
- Raggio operativo: ≤ 100m
- Range di frequenza: 2.402GHz - 2.480GHz
- Tempo di ricarica: ≤ 1,5 h
- Autonomia trasmettitore: ≤ 8h
- Autonomia ricevitore: ≤ 12h
- Batteria: Lithium 400 mAh
- Alimentazione: 5V



Prodotto da:
KARMA ITALIANA SRL
Via Gozzano, 38 bis
21052 Busto Arsizio (VA) - Italy

Ver: 23.1



Made in China

(10)

(11)


TG 10 System

User manual

www.karmaitaliana.it

INTRODUCTION

This system is intended for tourism or organizing outdoor activities, to speak or pass information to a group of people.

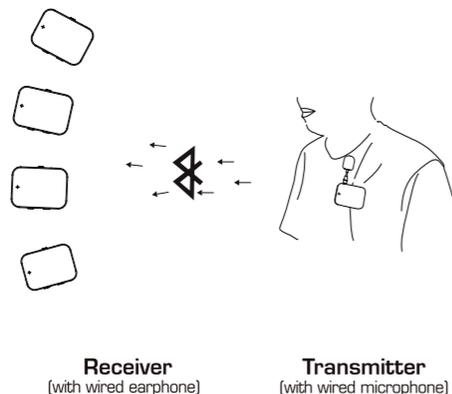

(1)

3 WAYS TO WEAR ITEMS

Transmitter and receiver can be worn over the shoulder thanks to the supplied strap




Alternatively, they can be attached to clothing via the clip on the back



(2)


3 WAYS TO USE TRANSMITTER

The transmitter can use three different microphones: the built-in microphone, the supplied external microphone, or an optional headset microphone (DMC 10).

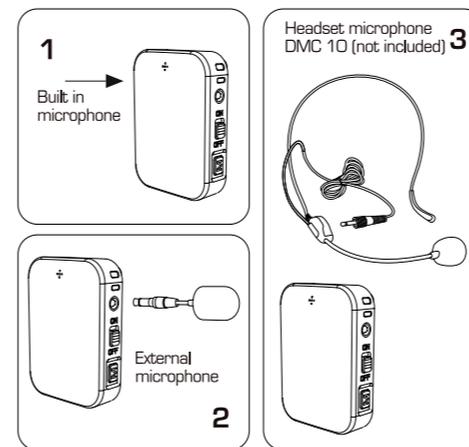


(3)

TRANSMITTER (TG 10TX)

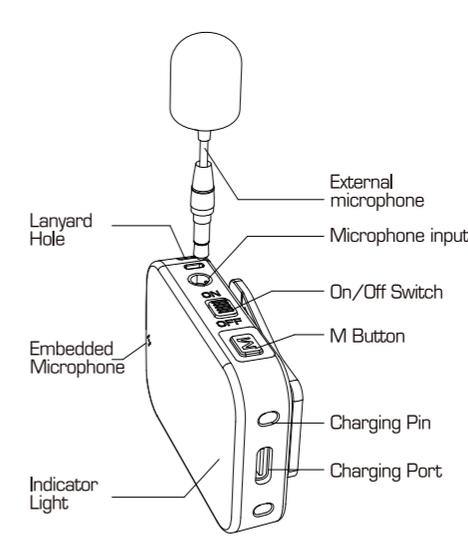


(4)

RECEIVER (TG 10RX)

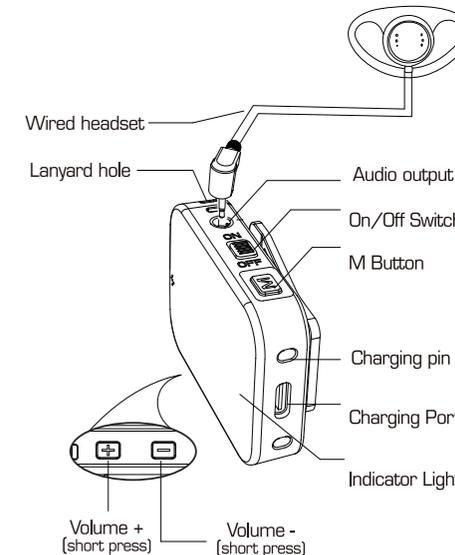

(5)

ON/OFF/USE

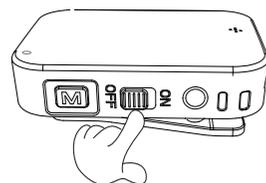

TRANSMITTER

Power ON

Move the power switch to the "ON" position

☀ Blue light is on

Power OFF

Move the power switch to the "OFF" position

☀ Blue light is off

RECEIVER

Power ON

Move the power switch to the "ON" position

☀ Blue light flashes once every 3 seconds

Power OFF

Move the power switch to the "OFF" position


☀ Blue light is off

The system is ready to use when powered on

(6)


RECEIVER TRANSMITTER CONNECTION

1. Power on the transmitter and press the "M" button 5 times, the transmitter will enter the connection state, and the blue light will flash fast.
2. Power on the receiver and press and hold the "M" button for 3 seconds, the blue light will flash fast.

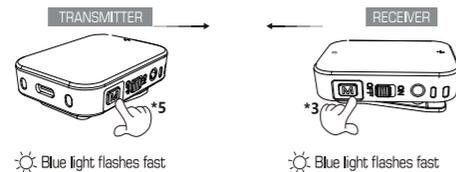

3. Bring the transmitter and receiver close to each other; the two are automatically connected, and the receiver indicator light turns to slow flash


4. After successful interconnection, click on the transmitter "M" button to confirm the connection. The blue light of the transmitter and receiver will be always on.

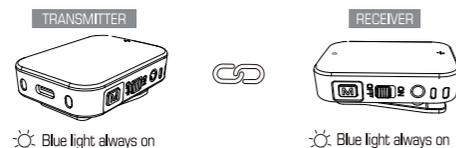

(7)

ADD NEW RECEIVERS

1. Press and hold down the transmitter "M" button for 3 seconds, the transmitter will enter the state of waiting for new receivers to join, and the blue light will flash fast.
2. Turn on the receiver that needs to join the group and press and hold the "M" button for 3 seconds, the blue light will flash fast.

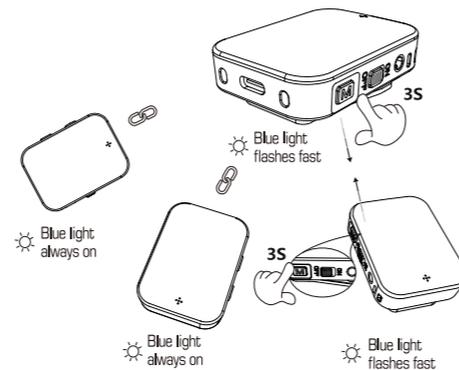


3. When a new receiver joins the group, the blue light of the receiver flashes slowly; then click the "M" button of the transmitter to confirm pairing.
4. After successful pairing, the receiver blue light remains always on

(8)


HOW TO RECHARGE

Put the transmitter and receivers into the charging cradle to charge. The red light will be on when charging; the green light will be on when fully charged

It is possible to connect a further charger, using the second USB socket, and charge more units at the same time (max tot. 20 pcs)

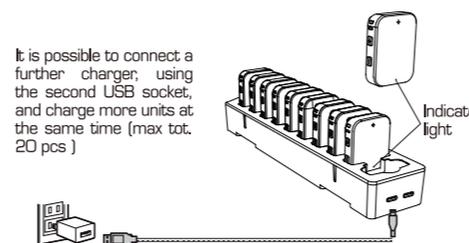

Charging the transmitter or receiver with the charging cable: red light stays on when charging; green light stays on when fully charged

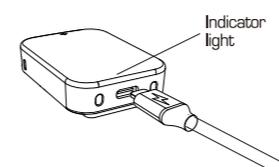

(9)

CAUTIONS AND WARNINGS

- Read and follow strictly the instructions contained in this manual.
- Do not open or take apart the device and don't make changes to it.
- To avoid the risk of shortcircuits don't expose to high temperatures (above 40°), rain or humidity. Do not allow flammable liquid, water or metal objects to enter the product.
- Use the fixture and its controls with due accuracy, avoiding falls, vibrations or impacts.
- In the event of a serious operating problem stop using the product immediately and contact the authorized technical service.

BATTERY SAFETY WARNINGS

The product is powered by a rechargeable lithium battery. Do not remove, open or modify the battery. To avoid the risk of fire or explosion, do not expose the battery to flames, heat, humidity and avoid shocks. Do not maintain the product on charge more than necessary. In the event of battery leaking, do not use the device and do not allow the liquid to come into contact with the skin or eyes.

(10)

EU COMPLIANCE DECLARATION

Hereby, KARMA ITALIANA SRL declares that the item TG 10TX / TG 10RX / TG 10CH are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.karmaitaliana.it

Karma Italiana srl

TECHNICAL SPECIFICATIONS

- Transmitting Power: Class 1
- Support: HSP, HFP, A2DP, AVRCP
- Operating range: ≤ 100m
- Frequency range: 2.402GHz - 2.480GHz
- Charge time: ≤ 1.5 h
- Transmitter working time: ≤ 8h
- Receiver working time: ≤ 12h
- Battery: Lithium 400 mAh
- Input: 5V ---



Produced by:
KARMA ITALIANA Srl
Via Gozzano, 38 bis
21052 Busto Arsizio (VA) - Italy

Ver: 23.1



Made in China

(11)